

## Natural Gas Fueling Stations



SKU 8220


### SPECIFICATIONS

Filling time for 80 L (565 cu ft) tank 0–2900 psi (0–200 bar)	1.5 hours
Charging Rate	6 CFM (170 L/min) - 10 m <sup>3</sup> /h
Operating Pressure	2900 or 3600 psi (200 or 250 bar)
Power Options 5.5 hp (4 kW)	208-230V / E3 / 50 or 60 Hz 440-480V / E3 / 60 Hz 380-415V / E3 / 50 Hz
Dimensions (L × W × H)	26.4 × 27.6 × 41.3 in (67 × 70 × 105 cm)
Dry Weight	397 lb (180 kg)
Noise	70 dB (at 1 m distance)

### FEATURES

- Low oil level switch
- Pressure relief each stage
- High temperature switch
- Final pressure switch
- Stage pressure gauges
- TEFC - Class 1 Div 2 electric motor
- Inlet shutoff solenoid
- Final filter with A4 molecular sieve
- Low inlet pressure switch
- Automatic condensate drains
- Pressure relief flow switch shutdown
- Remote mount motor control box

# NUVAIR MCH10 CNG COMPRESSOR

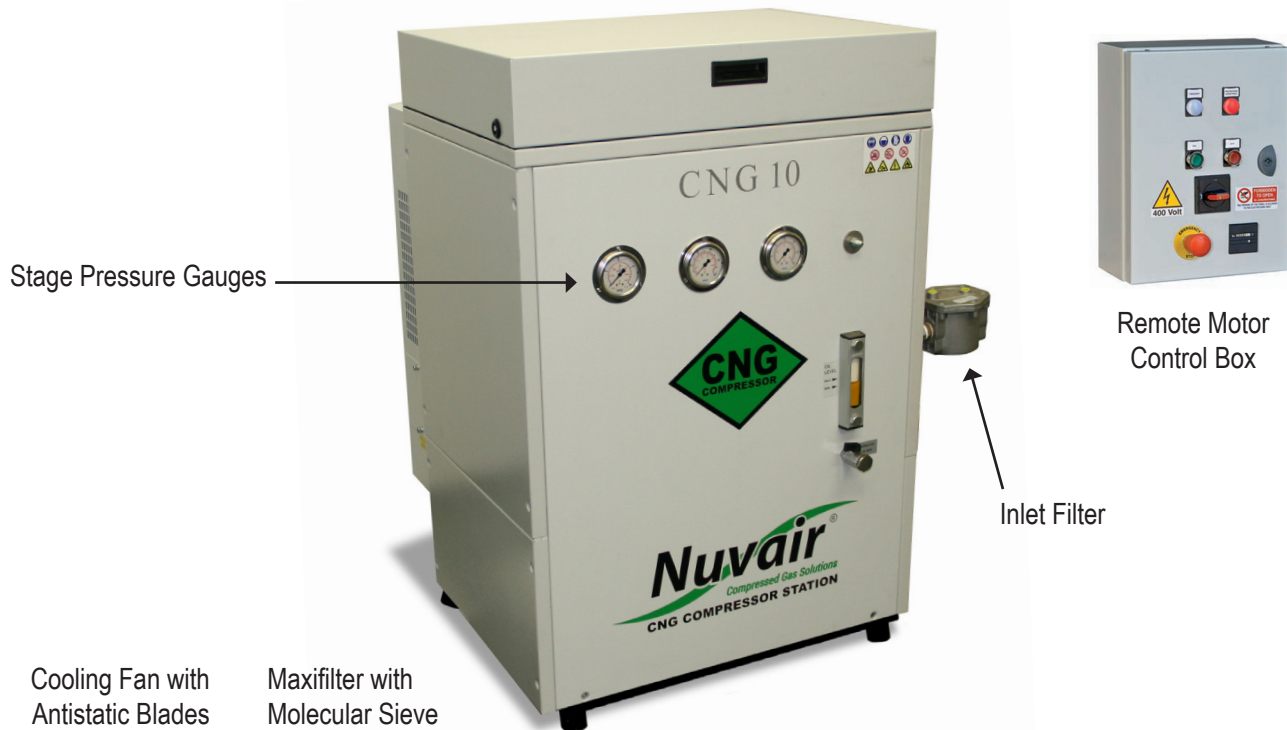

Cooling Fan with Antistatic Blades

Maxifilter with Molecular Sieve



Final Pressure Switch

Compressor Oil Level

Stainless Steel Intercoolers

Oil Drain

Safety Valve (PRD)

Class 1 DIV 2 Authorized Motor

Rubber Feet

