


FEATURES

Compressor

- 4 cylinder, 4-stage, air-cooled
- Interstate pressure gauges
- (2) Large interstage condensate separators
- Large stainless steel interstage cooling tubes
- Low pressure oil pump with filter
- Oil level sight gauge and oil pressure gauge
- Automatic condensate drains
- Low oil shutdown switch
- High temperature switch
- SEP-15 high pressure moisture separator
- Dual filter filtration (60,000 cu ft)
- Visual CO / moisture indicator
- Aluminum frame with stainless steel comp plate
- Vibration isolation frame mounts
- EPA certified 13-gallon fuel tank

Engine

- Honda gas GX690RTXA2
- Hour meter
- Loadless start/idle control

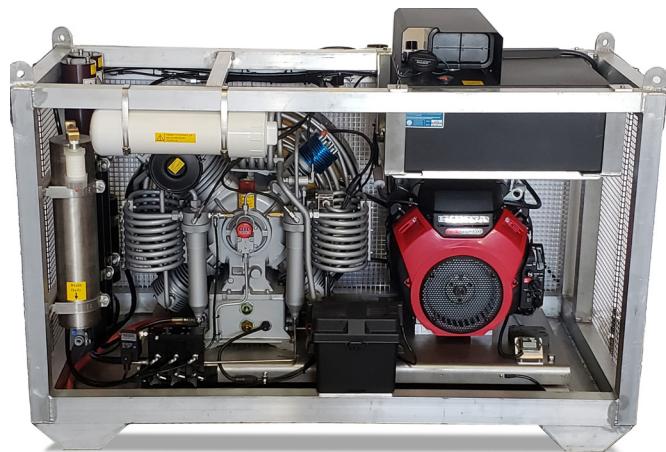

OPTIONS

- Certified lifting eyes
- Pro CO with audible alarm
- Diester based lubricant
- Moisture analyzer
- Filtration (90,000-120,000 cu ft)
- Upgrade to 6000 psi (414 bar)

SPECIFICATIONS

SKU: 8048-G

Fill Time*	~ 3 minutes
Charging Rate*	22 SCFM (623 L/min)
CFM FAD	18 CFM (510 L/min)
Max Operating Pressure	5000 psi (345 bar)
RPM	1180
Number of Stages	4
Oil Pressure	5.8 to 58 psi (0.4 to 4 bar)
Air Quality	Grade E
Engine	Honda gas GX690RTXA2 22.1 hp
Dimensions (L x W x H)	64 x 32 x 45 in (163 x 81 x 114 cm)
Weight	750 lb (340 kg)

*Based on 80 cu ft cylinder from 500 to 5000 psi.