




The ultimate filtration & drying technology



ALPHA


Compressed Air Filter Range

Exceptional engineering.
Improved performance.
Customer focus.



ALPHA SERIES

Introducing the Alpha Series, Walker Filtration's most advanced filter to date

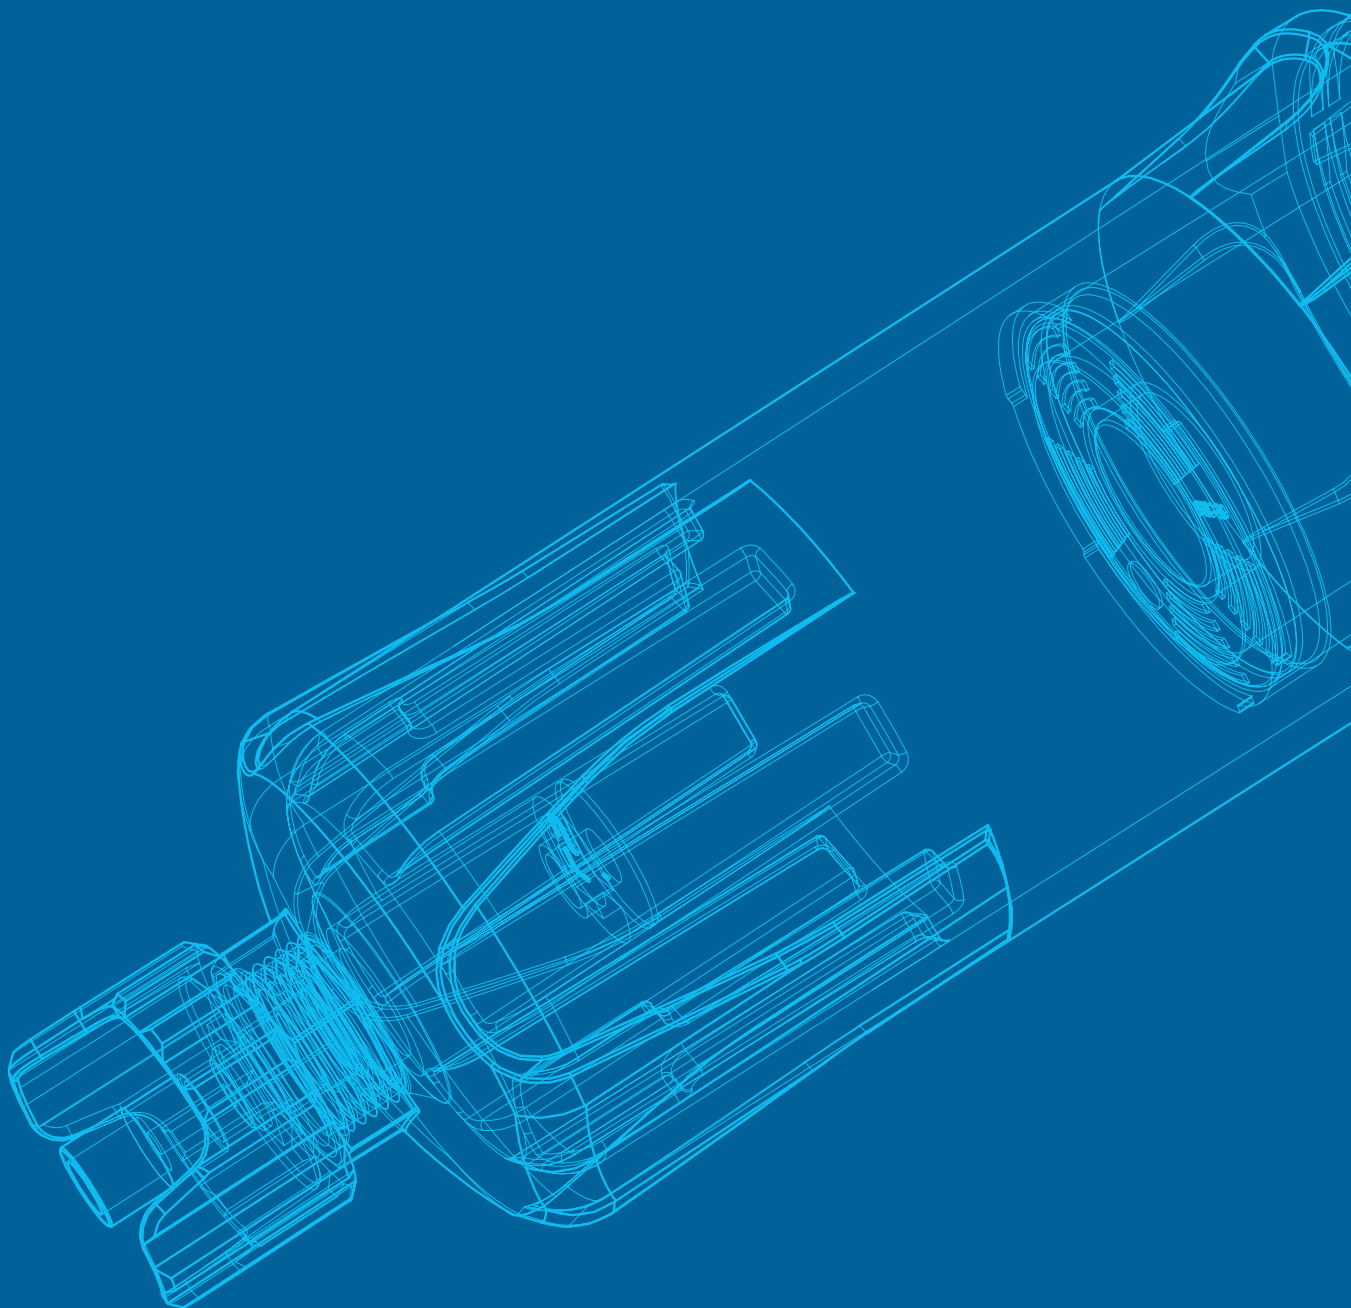

Where engineering excellence meets innovative filtration design



To our customers, Walker Filtration stands for innovation, quality and exceptional customer service.

Our promise is to provide high performing, energy efficient and cost effective compressed air and gas filtration solutions that meet the exacting standards set out in ISO 8573-1: 2010.

Our commitment to exceptional design, along with a proven track record of engineering excellence, has allowed us to remain at the forefront of compressed air and gas filtration and drying. We understand that our long-term success depends on our ability to deliver product of exceptional quality and continuously innovate, which is why our clients and customers have put their complete trust in our product for over 35 years.

Central to our business is providing tailored solutions to our customers' challenging compressed air and gas problems worldwide.

As partners of choice, we work hard to understand our customer needs. Whether our customers require high quality, reliable and economical replacement elements, or a unique custom built solution tailored to their needs.

Walker Filtration delivers the ultimate filtration and drying solution every time.






Walker Filtration's Alpha Series is market leading in the industry today.

With energy efficiency and low total cost of ownership at the very forefront of the design, the Alpha Series surpasses its predecessors and conventional filters in the marketplace, proving to be Walker Filtration's most advanced filter yet.


The expertly engineered Alpha Series not only achieves the highest air purity standards in line with ISO 8573-1: 2010, it also incorporates the latest in filtration technology. The filter housing has been redesigned to reduce differential pressure loss which, when combined with the element design, significantly improves air flow and performance, making the Alpha one of the most energy efficient filter housings available.

Walker Filtration's Design Engineers set out to create a forward thinking product range that is as dynamic as the applications they are used in. With a range that incorporates Water Separators, Particulate Filters, Coalescing Filters, Silicone Free Filters and Vapor Filters, all of which are available in a wide range of port sizes suitable for installation worldwide, they have done just that.

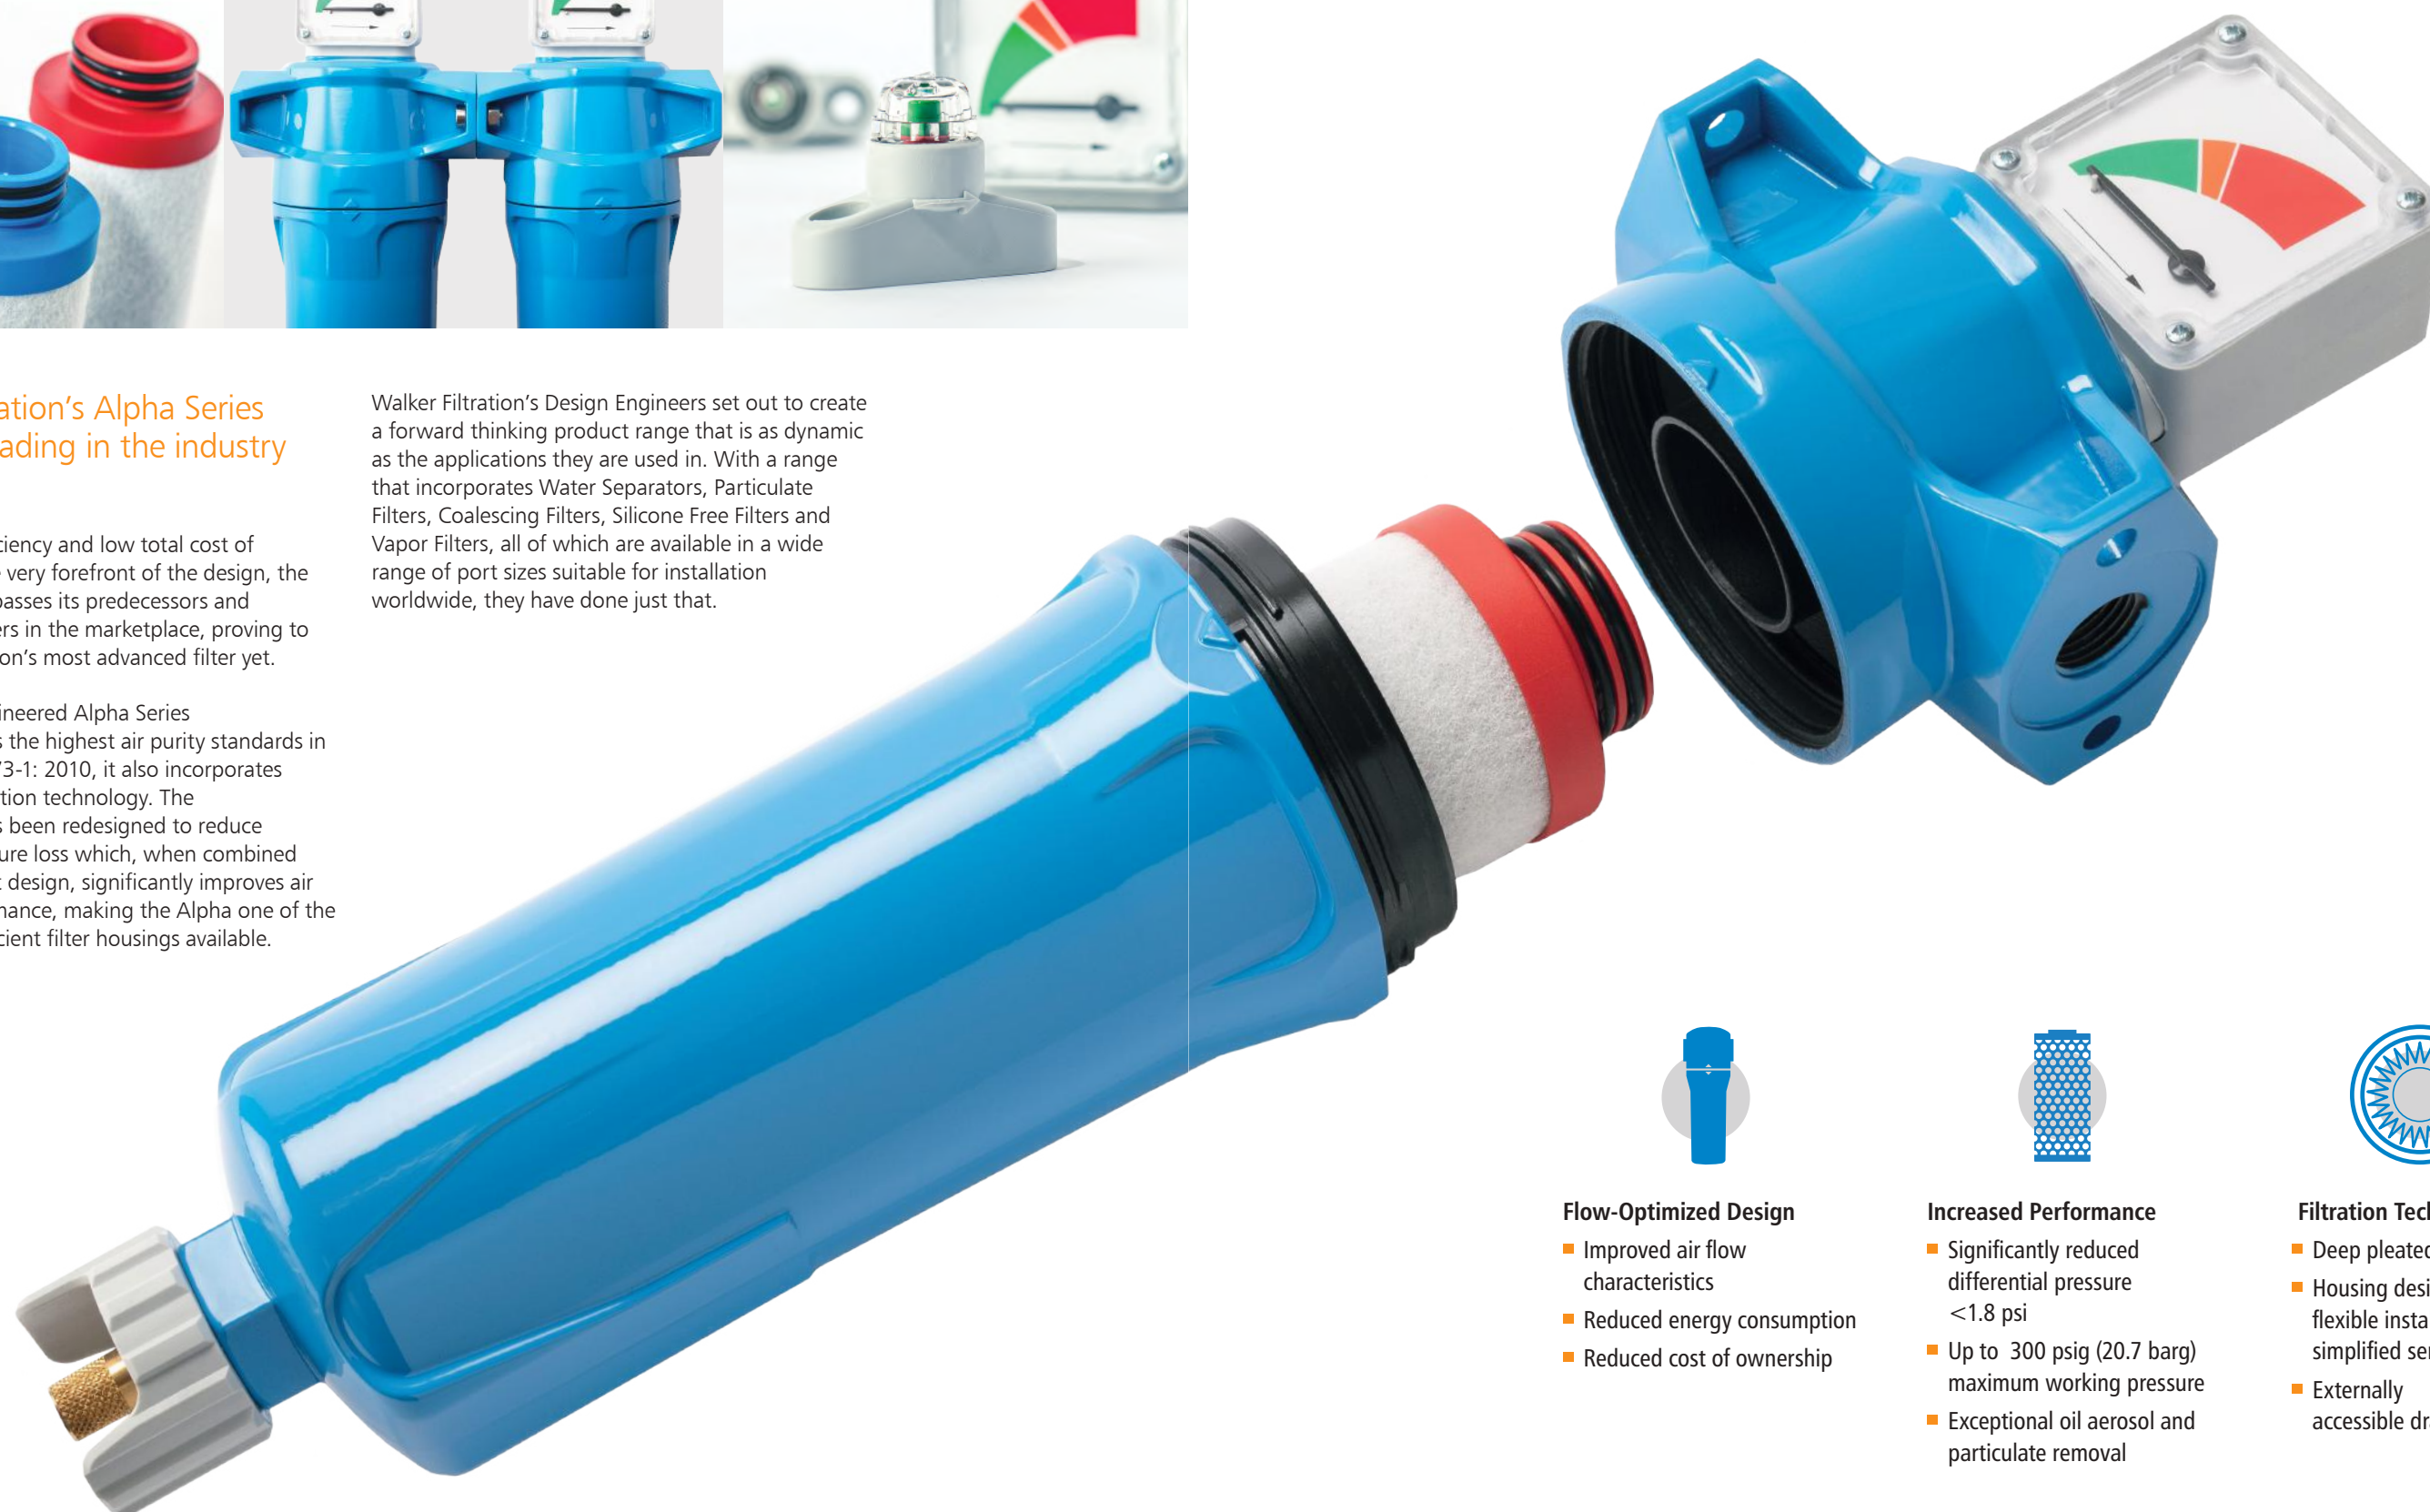


Flow-Optimized Design

- Improved air flow characteristics
- Reduced energy consumption
- Reduced cost of ownership



Increased Performance

- Significantly reduced differential pressure <1.8 psi
- Up to 300 psig (20.7 barg) maximum working pressure
- Exceptional oil aerosol and particulate removal



Filtration Technology

- Deep pleated media
- Housing design for flexible installation and simplified serviceability
- Externally accessible drain

Introducing Alpha. The Ultimate in Filtration Performance.

The Alpha Series provides a comprehensive range that protects downstream equipment from contaminants found in compressed air. With a maximum operating temperature of up to 248°F (120°C), and improved maximum operating pressures of up to 300 psig (20.7 barg), whatever your filtration requirement, we have a solution.

Features & Benefits

Flexible Installation

Available in 1/8" to 3" threaded NPT, Rp (BSP Parallel), or Rc (BSP Taper) port sizes, with flow rates of 6 – 1500 scfm (10 – 2550 Nm³/h). Maximum temperature 248°F (120°C) and maximum operating pressure of up to 300 psig (20.7 barg), dependent upon filter model configuration.

Modular Filter

Low cost connecting kits and filter head design enables easy and simple close coupling assembly to accommodate a wide range of application requirements.

Flow-optimized Design

Advanced filter design to optimize flow capabilities, significantly reducing differential pressure loss and therefore increasing energy efficiency.



Product Safety in Mind

Guaranteed safe housing closure with single-start thread and fixed thread engagement stop to prevent over tightening. Lock indication arrows assure effective sealing.

Reliable Filtration Performance

Tested and validated in accordance with ISO 12500-1 & ISO 8573-1: 2010, Walker Filtration filter housings and elements are manufactured using only the highest quality materials to provide optimum performance and improved efficiencies.

Color Coded Elements

Corrosion resistant color coded end caps for easy and accurate filtration grade identification.



Robust Design & EP Corrosion Protection

The range offers corrosion resistance and salt spray testing to ISO 9227: 2012. Durable and hard wearing electrophoretic coating on both internal and external faces of the filter housing followed by a tough polyester powder coating.

Market Leading Performance

Introducing deep pleated media technology across Alpha elements; a step change in performance, combined with a custom engineered anti re-entrainment layer for exceptional oil coalescence, ensures low total cost of ownership.

Externally Accessible Drain

Unique, externally accessible automatic drain fitted to Filter models A30070 to A31500. The drain is supplied as standard with a plastic drain shield cover.



Simplified Serviceability

Designed with servicing and maintenance in mind, the profiled bowl design and hexagonal wrench locator coupled with the internal unique push fit element ensures a simple, quick and reliable process.

Differential Pressure Equipment

Supplied to aid with servicing of filter elements (except A30006, A30015).

Unrivalled Performance

Available in 4 filtration grades (5 - 0.01 micron), Alpha elements ensure significant energy savings with guaranteed class leading performance; X1 and XA grade across the range provide a saturated differential pressure of less than or equal to 1.8 psi.




Leading Filtration Technology

Walker Filtration utilizes deep pleated media to deliver market leading filtration performance. The forward thinking design delivers exceptional results in both oil aerosol removal and particulate retention; significantly reducing differential pressure and energy consumption for low operational lifetime costs. Engineered to deliver a step change in performance, the Alpha element optimizes filtration efficiencies and produces compressed

air in line with the highest standards of air purity, meeting the quality classes specified in ISO 8573-1: 2010.

To ensure optimal performance and low cost is maintained, Alpha filter elements should be replaced with Walker Filtration original parts every 12 months/8000 hours (whichever comes first). Activated Carbon filter elements should be replaced at least every 6 months.

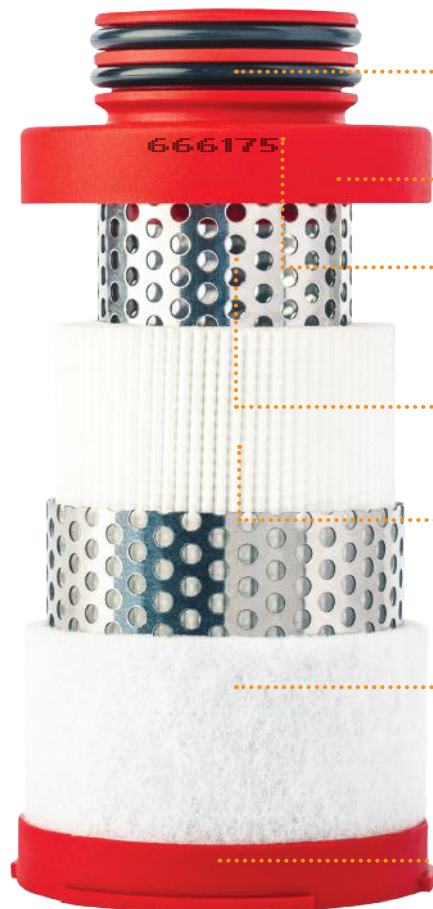

Features & Benefits

Push Fit Walker Filtration Elements ensure perfect sealing within the filter housing and assist with removal

Corrosion resistant end caps injection moulded from glass filled nylon for added durability

Full traceability is provided by ink jet marking manufacturing batch codes on every filter element complying with our ISO 9001 manufacturing process

High quality stainless steel cylinders provide corrosion resistance and deliver strength and stability to the element

Custom engineered Hydrophobic & Oleophobic Borosilicate media specifically developed to deliver consistently low pressure drop, combined with pleated element construction for high dirt holding capacity and an increased filtration surface area

Custom outer drainage layer prevents oil carryover and improves coalescence performance

Walker Filtration Element end cap color coding system for quick and simple grade identification

Performance Assured

For more than 35 Years, Walker Filtration has built a reputation of high quality, well-engineered filtration and drying products. Founded on sound engineering principles, we continually invest in technology and expertise to stay at the leading edge of innovation. It is this investment, combined with the extensive knowledge of our engineering and technical team, which has allowed us to achieve the dramatic improvements in performance that our Alpha Series delivers.

The Alpha's optimized performance has been extensively proven throughout the research and development phase using our in house test facilities, finite element analysis and computational fluid dynamics.



Filter Housing Design

The ISO 8573 group of International Standards is used for the classification of compressed air.

- ✓ 1000 hour neutral salt spray test for corrosion to ISO 9227: 2006
- ✓ Burst pressure tested in excess of 1450 psig for a 5:1 safety factor
- ✓ Housings are pressure decay tested before despatch. Fine filters are 100% aerosol integrity tested

Element Technology

The Alpha Series is available in a complete range of contaminant removal grades designed to meet the compressed air purity requirements throughout industry.

- ✓ ISO 8573-1: 2010 – Compressed air purity standard
- ✓ ISO 12500 Series – International standard for compressed air filter testing

Independent Validation

Walker Filtration's filter housings are approved to international standards including:

- ✓ **Pressure Equipment Directive 2014/68/EU**
Lloyd's Register EMEA – Notified Body No. 0038
71 Fenchurch Street, London, EC3M 4BS
- ✓ **ISO 9001 Quality Systems – LRQ0930553**
Lloyd's Register EMEA – Notified Body No. 0038
1 Trinity Park, Bickenhill Lane, Birmingham, B37 7ES, United Kingdom
- ✓ **CRN Approved – CRN0E22360**
For use within Canada




Extensive Filter Range

The range of threaded filters is available from 1/8" to 3" with flow rates from 6 – 1500 scfm (10 – 2550 Nm³/hr) with a maximum operating pressure of 300 psig (20.7 barg).

As with all our products, Walker Filtration have designed the Alpha Series to provide the greatest flexibility and best in class performance.

Our product portfolio also includes single and duplex filters, fabricated filter housings, silicone free filters, medical filters and desiccant dryers as well as a comprehensive range of filter elements suitable for a wide range of applications.

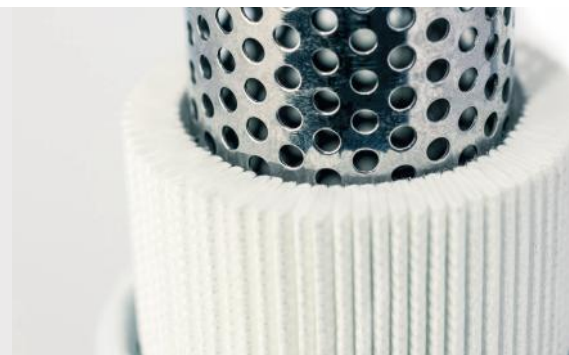

Water Separators

The Alpha Water Separator combines proven Alpha centrifugal technology with a forward thinking housing design to deliver market leading water removal efficiencies – eliminating up to 99% bulk water and guaranteeing continuously low differential pressure.

Compressed Air & Gas Filters

Our range of single and duplex air and gas filters come in four filtration grades (Activated Carbon and 5 to 0.01 micron), with silicone free options and specialist LABSfrei and ATEX capability.

Dust Filter

Available in all grades, for installations downstream of regenerative compressed air and gas dryers.

Vacuum Pump Protection

Our range of filters offer high efficiency and optimum contaminant removal for vacuum pump protection.

Vacuum Pump Exhaust

Two types of vacuum pump exhaust filters are available to remove oil mist from oil injected vacuum pumps.

Medical Sterile

This specialist range of filters is designed to meet the very specific needs for medical compressed air plants.

PRO XF Flanged Filters

Modular filtration concept which can be easily multi-banked together – ideal for larger flows from 900 – 3000 scfm (1529 – 5097 Nm³/hr).

Fabricated Flanged Filters

The ideal solution for larger flow applications, guaranteeing the highest levels of air quality from 2800 - 16100 scfm (4757 - 27354 Nm³/hr). Walker Filtration can supply flanged filters in two formats - PRO XF Flanged Filters and Conventional Fabricated Vessels.




Accessories

To accompany our standard range, we supply a comprehensive range of spares and accessories. For more information on accessories please see Walker Filtration Product Range and Price Guide.



For more information on our full product range, please contact your nearest sales team or visit www.walkerfiltration.com

We Provide Solutions for Your Industry

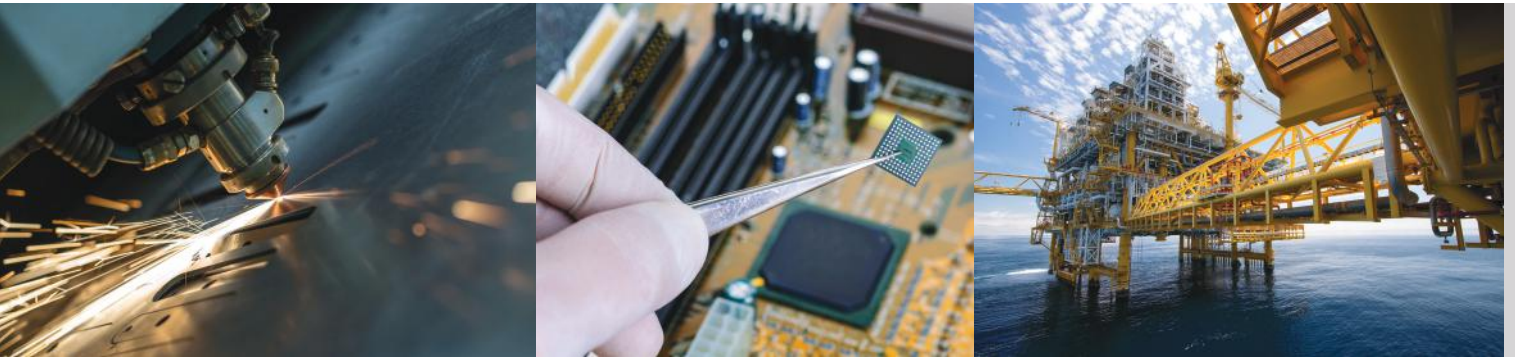

In any compressed air system, impurities are inevitable. Dust, dirt, water and oil contaminants can reduce air quality and significantly affect system efficiency.

Inadequate or incorrect filtration can negatively impact performance and end-use equipment, and cause potential costly system downtime.

With over 35 years' experience Walker Filtration has built up extensive industry know-how that supports our customers with tailored solutions to meet the varying demands and standards required by industries in delivering high performance compressed air.

With enhanced housing features and market leading element performance the Alpha Series offers a comprehensive range of products that deliver up to 99.999% filtration efficiencies for particulates as small as 0.01 microns.



General Industry



Vacuum Packaging



Food Production



Paint Spraying



Beverage & Breweries



Laboratories



Power Generation



Automotive



Military



Welding



Medical



Electronics

Tailored Solutions for OEM Customers



At Walker Filtration, we are proud of our exceptional in-house design capabilities offering custom solutions that meet exacting standard set by our customers.

We have designed, developed and delivered many unique and successful OEM products to industry leaders across the world.

The expertise of our dedicated design team combined with our manufacturing capability provide the flexibility needed to support our customers with complex requirements. We work in complete collaboration with our OEM customers from initial concept designs and engineering, through testing and validation, to branding and aftermarket support. Our focus and dedication is straightforward – we enjoy working with our customers, offering competent advice and sound engineering, to help achieve the specific solutions required.

CONSULTATION
& DEVELOPMENT



TESTING &
APPROVAL



MANUFACTURE
& DELIVERY

Intelligent Branding


We work with OEM customers to provide options to customize and brand products and packaging, along with a range of supporting marketing materials, to achieve maximum brand identity and recognition. All aspects of the product are considered, including language support, unique part numbers and transport details.

Performance and Validation

For complete peace of mind our OEM developments are extensively tested to the highest standards; assuring complete product quality and performance. Throughout the entire process, excellent levels of customer service are at the heart of everything we do.

Technical Specification

| | Filter Model | Pipe Size | Flow Rate | | Dimensions inches (mm) | | | | Weight | | Element Model |
|--------------------------|----------------|-----------|-----------|---------------------|------------------------|--------------|-------------|------------|--------|----------------|------------------|
| | | | SCFM | Nm ³ /hr | A | B | C | D | lbs | kg | |
| Water Separators | A30006WS | 1/8 | 6 | 10 | 1.97 (50) | 0.67 (17) | 6.18 (157) | 2.36 (60) | 0.6 | 0.3 | N/A |
| | A30015WS | 1/4 | 15 | 25 | 1.97 (50) | 0.67 (17) | 6.18 (157) | 2.36 (60) | 0.6 | 0.3 | N/A |
| | A30025WS | 1/4 | 25 | 42 | 2.76 (70) | 0.91 (23) | 9.09 (231) | 2.76 (70) | 1.3 | 0.6 | N/A |
| | A30032WS | 3/8 | 35 | 59 | 2.76 (70) | 0.91 (23) | 9.09 (231) | 2.76 (70) | 1.3 | 0.6 | N/A |
| | A30050WS | 1/2 | 50 | 85 | 2.76 (70) | 0.91 (23) | 9.09 (231) | 2.76 (70) | 1.3 | 0.6 | N/A |
| | A30070WS | 1/2 | 70 | 119 | 5.00 (127) | 1.26 (32) | 11.22 (285) | 3.15 (80) | 3.7 | 1.7 | N/A |
| | A30125WS | 3/4 | 125 | 212 | 5.00 (127) | 1.26 (32) | 11.22 (285) | 3.15 (80) | 3.7 | 1.7 | N/A |
| | A30175WS | 1 | 175 | 297 | 5.00 (127) | 1.26 (32) | 11.22 (285) | 3.15 (80) | 3.7 | 1.7 | N/A |
| | A30280WS | 1 1/4 | 280 | 476 | 5.51 (140) | 1.61 (41) | 18.74 (476) | 3.15 (80) | 6.6 | 3.0 | N/A |
| | A30320WS | 1 1/2 | 320 | 544 | 5.51 (140) | 1.61 (41) | 18.74 (476) | 3.15 (80) | 6.6 | 3.0 | N/A |
| | A30400WS | 1 1/2 | 400 | 680 | 6.69 (170) | 2.08 (53) | 20.00 (508) | 3.94 (100) | 10.8 | 4.9 | N/A |
| | A30700WS | 2 | 700 | 1189 | 6.69 (170) | 2.08 (53) | 27.87 (708) | 3.94 (100) | 10.8 | 4.9 | N/A |
| | A30850WS | 2 1/2 | 850 | 1444 | 8.66 (220) | 2.75 (70) | 16.54 (420) | 3.94 (100) | 17.6 | 8.0 | N/A |
| A31500WS | 3 | 1500 | 2550 | 8.66 (220) | 2.75 (70) | 16.54 (420) | 3.94 (100) | 17.6 | 8.0 | N/A | |
| Coalescing & Particulate | A30006 (grade) | 1/8 | 6 | 10 | 1.97 (50) | 0.67 (17) | 6.18 (157) | 2.36 (60) | 0.6 | 0.3 | E30306 (grade) |
| | A30015 (grade) | 1/4 | 15 | 25 | 1.97 (50) | 0.67 (17) | 6.18 (157) | 2.36 (60) | 0.6 | 0.3 | E30306 (grade) |
| | A30025 (grade) | 1/4 | 25 | 42 | 2.76 (70) | 0.91 (23) | 9.09 (231) | 2.76 (70) | 1.3 | 0.6 | E30408 (grade) |
| | A30032 (grade) | 3/8 | 32 | 54 | 2.76 (70) | 0.91 (23) | 9.09 (231) | 2.76 (70) | 1.3 | 0.6 | E30408 (grade) |
| | A30050 (grade) | 1/2 | 50 | 85 | 2.76 (70) | 0.91 (23) | 9.09 (231) | 2.76 (70) | 1.3 | 0.6 | E30412 (grade) |
| | A30070 (grade) | 1/2 | 70 | 119 | 5.00 (127) | 1.26 (32) | 11.22 (285) | 3.15 (80) | 3.7 | 1.7 | E30612 (grade) |
| | A30085 (grade) | 3/4 | 85 | 144 | 5.00 (127) | 1.26 (32) | 11.22 (285) | 3.15 (80) | 3.7 | 1.7 | E30612 (grade) |
| | A30105 (grade) | 1 | 105 | 178 | 5.00 (127) | 1.26 (32) | 11.22 (285) | 3.15 (80) | 3.7 | 1.7 | E30612 (grade) |
| | A30125 (grade) | 3/4 | 125 | 212 | 5.00 (127) | 1.26 (32) | 14.57 (370) | 3.15 (80) | 4.4 | 2.0 | E30621 (grade) |
| | A30175 (grade) | 1 | 175 | 297 | 5.00 (127) | 1.26 (32) | 14.57 (370) | 3.15 (80) | 4.4 | 2.0 | E30621 (grade) |
| | A30280 (grade) | 1 1/4 | 280 | 476 | 5.51 (140) | 1.61 (41) | 18.74 (476) | 3.35 (85) | 6.6 | 3.0 | E30731 (grade) |
| | A30320 (grade) | 1 1/2 | 320 | 680 | 5.51 (140) | 1.61 (41) | 18.74 (476) | 3.35 (85) | 6.6 | 3.0 | E30731 (grade) |
| | A30400 (grade) | 1 1/2 | 400 | 680 | 6.69 (170) | 2.08 (53) | 20.00 (508) | 3.94 (100) | 10.8 | 4.9 | E30831 (grade) |
| | A30450 (grade) | 2 | 450 | 765 | 6.69 (170) | 2.08 (53) | 20.00 (508) | 3.94 (100) | 10.8 | 4.9 | E30831 (grade) |
| | A30700 (grade) | 2 | 700 | 1189 | 6.69 (170) | 2.08 (53) | 27.87 (708) | 3.94 (100) | 12.1 | 5.5 | E30850 (grade) |
| | A30850 (grade) | 2 1/2 | 850 | 1444 | 8.66 (220) | 2.75 (70) | 28.97 (736) | 3.94 (100) | 23.1 | 10.5 | E31140 (grade) |
| | A30900 (grade) | 3 | 900 | 1529 | 8.66 (220) | 2.75 (70) | 28.97 (736) | 3.94 (100) | 23.1 | 10.5 | E31140 (grade) |
| | A31250 (grade) | 3 | 1250 | 2125 | 8.66 (220) | 2.75 (70) | 33.74 (857) | 3.94 (100) | 25.4 | 11.5 | E31160 (grade) |
| A31500 (grade) | 3 | 1500 | 2550 | 8.66 (220) | 2.75 (70) | 39.56 (1005) | 3.94 (100) | 27.6 | 12.5 | E31175 (grade) | |
| Duplex Filters | D3028XAC | 1/4 | 25 | 42 | 2.76 (70) | 7.83 (199) | 8.03 (204) | 2.76 (70) | 2.2 | 1.0 | E30408 DXA / DAC |
| | D3038XAC | 3/8 | 32 | 54 | 2.76 (70) | 7.83 (199) | 8.03 (204) | 2.76 (70) | 2.2 | 1.0 | E30408 DXA / DAC |
| | D3058XAC | 1/2 | 50 | 85 | 2.76 (70) | 7.83 (199) | 8.03 (204) | 2.76 (70) | 2.4 | 1.1 | E30412 DXA / DAC |
| | D3059XAC | 1/2 | 70 | 119 | 3.94 (100) | 9.29 (236) | 9.45 (240) | 3.15 (80) | 5.1 | 2.3 | E30613 DXA / DAC |
| | D3078XAC | 3/4 | 85 | 144 | 3.94 (100) | 9.29 (236) | 9.45 (240) | 3.15 (80) | 5.1 | 2.3 | E30613 DXA / DAC |
| | D3079XAC | 3/4 | 125 | 212 | 3.94 (100) | 14.02 (356) | 14.17 (360) | 3.15 (80) | 6.8 | 3.1 | E30625 DXA / DAC |
| | D3109XAC | 1 | 175 | 297 | 3.94 (100) | 14.02 (356) | 14.17 (360) | 3.15 (80) | 7.1 | 3.2 | E30625 DXA / DAC |

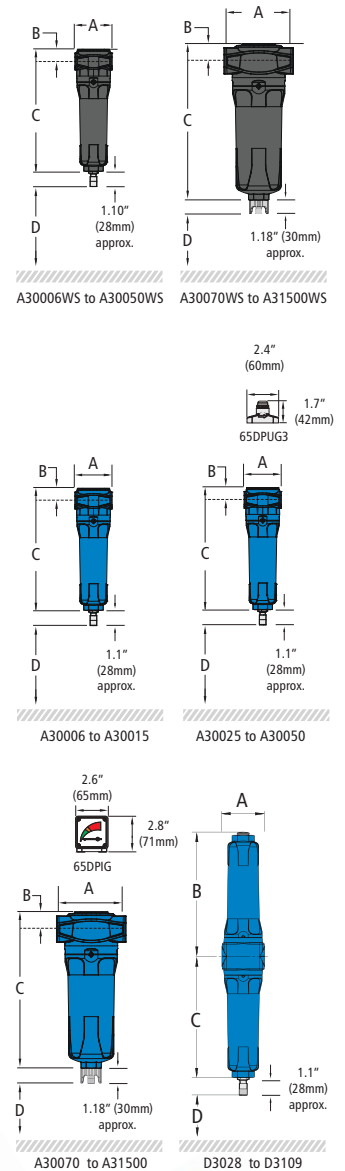

| Grade | X5 | | X1 | | XA | | AC | |
|--|---------------------|-----------|-----------------------|-----------|------------------------|-----------|-------------------------|-----------|
| Particle removal* | 5 micron | | 1 micron | | 0.01 micron | | 0.01 micron | |
| Maximum particle size class to ISO 8573-1: 2010. | 4 | | 3 | | 1 | | 1 | |
| Maximum oil content | 4 | | 3 | | 1 | | 1 | |
| Maximum oil carryover at 68°F (20°C) | 5 mg/m ³ | | 0.3 mg/m ³ | | 0.01 mg/m ³ | | 0.003 mg/m ³ | |
| Pressure loss - clean & dry | 0.6 psi | 40 mbar | 0.8 psi | 55 mbar | 1.2 psi | 85 mbar | 1.7 psi | 115 mbar |
| Pressure loss - saturated | 1.1 psi | 75 mbar | 1.8 psi | 125 mbar | 1.8 psi | 125 mbar | N/A | N/A |
| Pressure loss - element change | 12 mths | 8000 hrs | 12 mths | 8000 hrs | 12 mths | 8000 hrs | at least every 6 mths | |
| Maximum temperature - automatic drain | 176°F | 80°C | 176°F | 80°C | 176°F | 80°C | 122°F** | 50°C** |
| Maximum working pressure - automatic drain | 232 psig | 16 barg | 232 psig | 16 barg | 232 psig | 16 barg | 232 psig | 16 barg |
| Maximum temperature - manual drain | 248°F | 120°C | 248°F | 120°C | 248°F | 120°C | 122°F** | 50°C** |
| Maximum working pressure - manual drain | 300 psig | 20.7 barg | 300 psig | 20.7 barg | 300 psig | 20.7 barg | 300 psig | 20.7 barg |
| Element end cap color | Green | | Red | | Blue | | Black | |

* Particulate filtration grades RX5 (5 micron), RX1 (1 micron), RXA (0.01 micron), RAC (Activated Carbon) are also available.

** Maximum recommended operating temperature 77°F (25°C)

Pressure correction factors

For maximum flow rate, multiply model flow rate by the correction factor corresponding to the minimum operating pressure

| Operating pressure barg (psig) | 4 (58) | 5 (72) | 6 (87) | 7 (100) | 8 (115) | 10 (145) | 12 (174) | 14 (203) | 16 (232) | 20.7 (300) |
|--------------------------------|--------|--------|--------|---------|---------|----------|----------|----------|----------|------------|
| 7 barg - correction factor | 0.76 | 0.84 | 0.92 | 1.00 | 1.07 | 1.19 | 1.31 | 1.41 | 1.51 | 1.73 |



W WALKER FILTRATION

The ultimate filtration & drying technology

Walker Filtration Inc.

4748 Pacific Avenue
Erie, PA 16506, USA
tel +1 814 836 2900
fax +1 814 836 7921
email usa@walkerfiltration.com
web www.walkerfiltration.com/en-us



THE QUEEN'S AWARDS
FOR ENTERPRISE:
INNOVATION
2016



Walker Filtration Ltd

Birtley Road, Washington,
Tyne & Wear, NE38 9DA, UK
tel +44 (0) 191 417 7816
fax +44 (0) 191 415 3748
email sales@walkerfiltration.co.uk **web**
www.walkerfiltration.com

Walker Filtration Pty Ltd

16-18 Lindon Court,
Tullamarine VIC 3043, Australia
tel +61 (0)3 9330 4144
fax +61 (0)3 9330 4177
email sales@walkerfiltration.com.au **web**
www.walkerfiltration.com/en-au

Walker Filtration Ltd Japan

Amikura Bldg., 2nd Floor
3-8-12 Haramachida, Machida-city
Tokyo 194-003, Japan
tel +81 (0) 42 850 8836
fax +81 (0)3 6685 2974
email japan@walkerfiltration.com
web www.walkerfiltration.com/ja