


Industry Leader Quincy 325 Low Pressure Compressor with Loadless Start and Head Unloaders

This package is built with the Honda hp 11.7 hp (8.7 kW) air cooled diesel engine. This package has a one gallon surge tank, over pressure relief, drain valve, large air after cooler, check valve, ball valves and plumbing. The frame is made with 6061 aluminum and has an enclosed bottom, lifting eyes, hinged handles and wheels that make it easy to move on and off the job. Perfectly balanced for one man moving; all equipment is inset, compressor and engine have independent vibration absorption mounts and are mounted on an aluminum plate.

FEATURES

- Quincy 325 LP compressor
- Electric start 11.7 hp Honda gas engine
- Tach / hour meter
- Aluminum frame with enclosed bottom, lifting eyes, handles and wheels
- Aluminum belt guard
- Over pressure, drain and check valves
- Certified lifting eyes
- 12 volt sealed battery
- 1.61 gallon fuel tank
- Air cooled after cooler

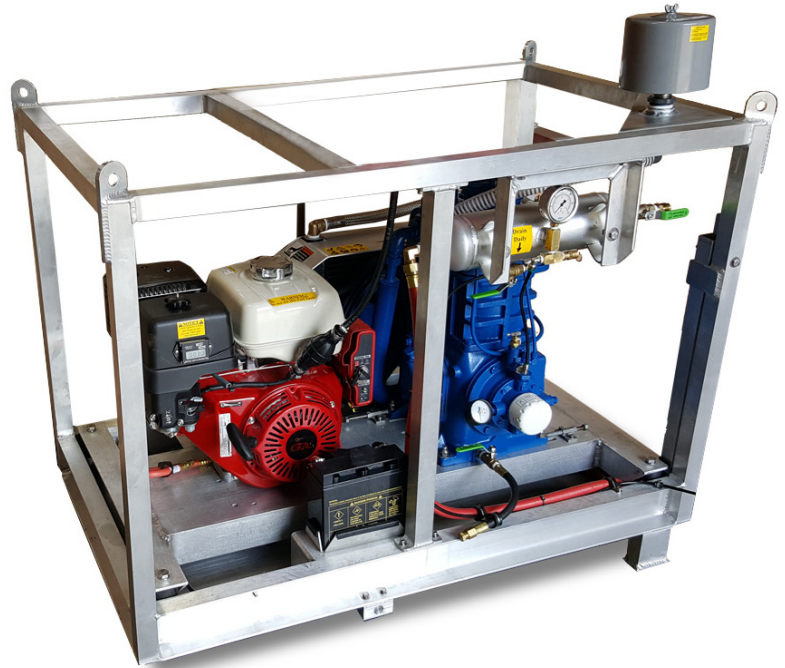

OPTIONS

- Steel or stainless steel frame
- Monitors / alarms for CO, CO₂, O₂, H₂S low pressure and high temp
- Three-stage breathing air filtration
- 30-gallon volume tank
- 250 or 300 psi

SPECIFICATIONS

	SKU: Q-325H	SKU: Q-325HL
Flow Rate	19 CFM @ 175 psi	19 CFM @ 175 psi
Engine Power	11.7 hp (8.7 kW)	11.7 hp (8.7 kW)
Max Operating Pressure	200 psi (14 bar)	200 psi (14 bar)
Number of Stages	2	2
Lubrication	Pressure	Pressure
Air Quality	N/A	Grade D
Dimensions (L x W x H)	48 x 29 x 41 in (122 x 74 x 104 cm)	48 x 29 x 61 in (122 x 74 x 156 cm)
Weight	531 lbs (254 kg)	689 lbs (313 kg)